

Water use and management

—

Cleaner production


Björn Frostell, Swedish Aral Sea Society Board Member
Senior Consultant Ecoloop AB, Stockholm
former Professor in Industrial Ecology, KTH, Stockholm

Lecture 6 in the Master Course
Sustainable Development and Sustainability Science 2023
2023-03-29

Part 1

Water use and management


Development of the industrial approach to environmental management 1750 - 2020

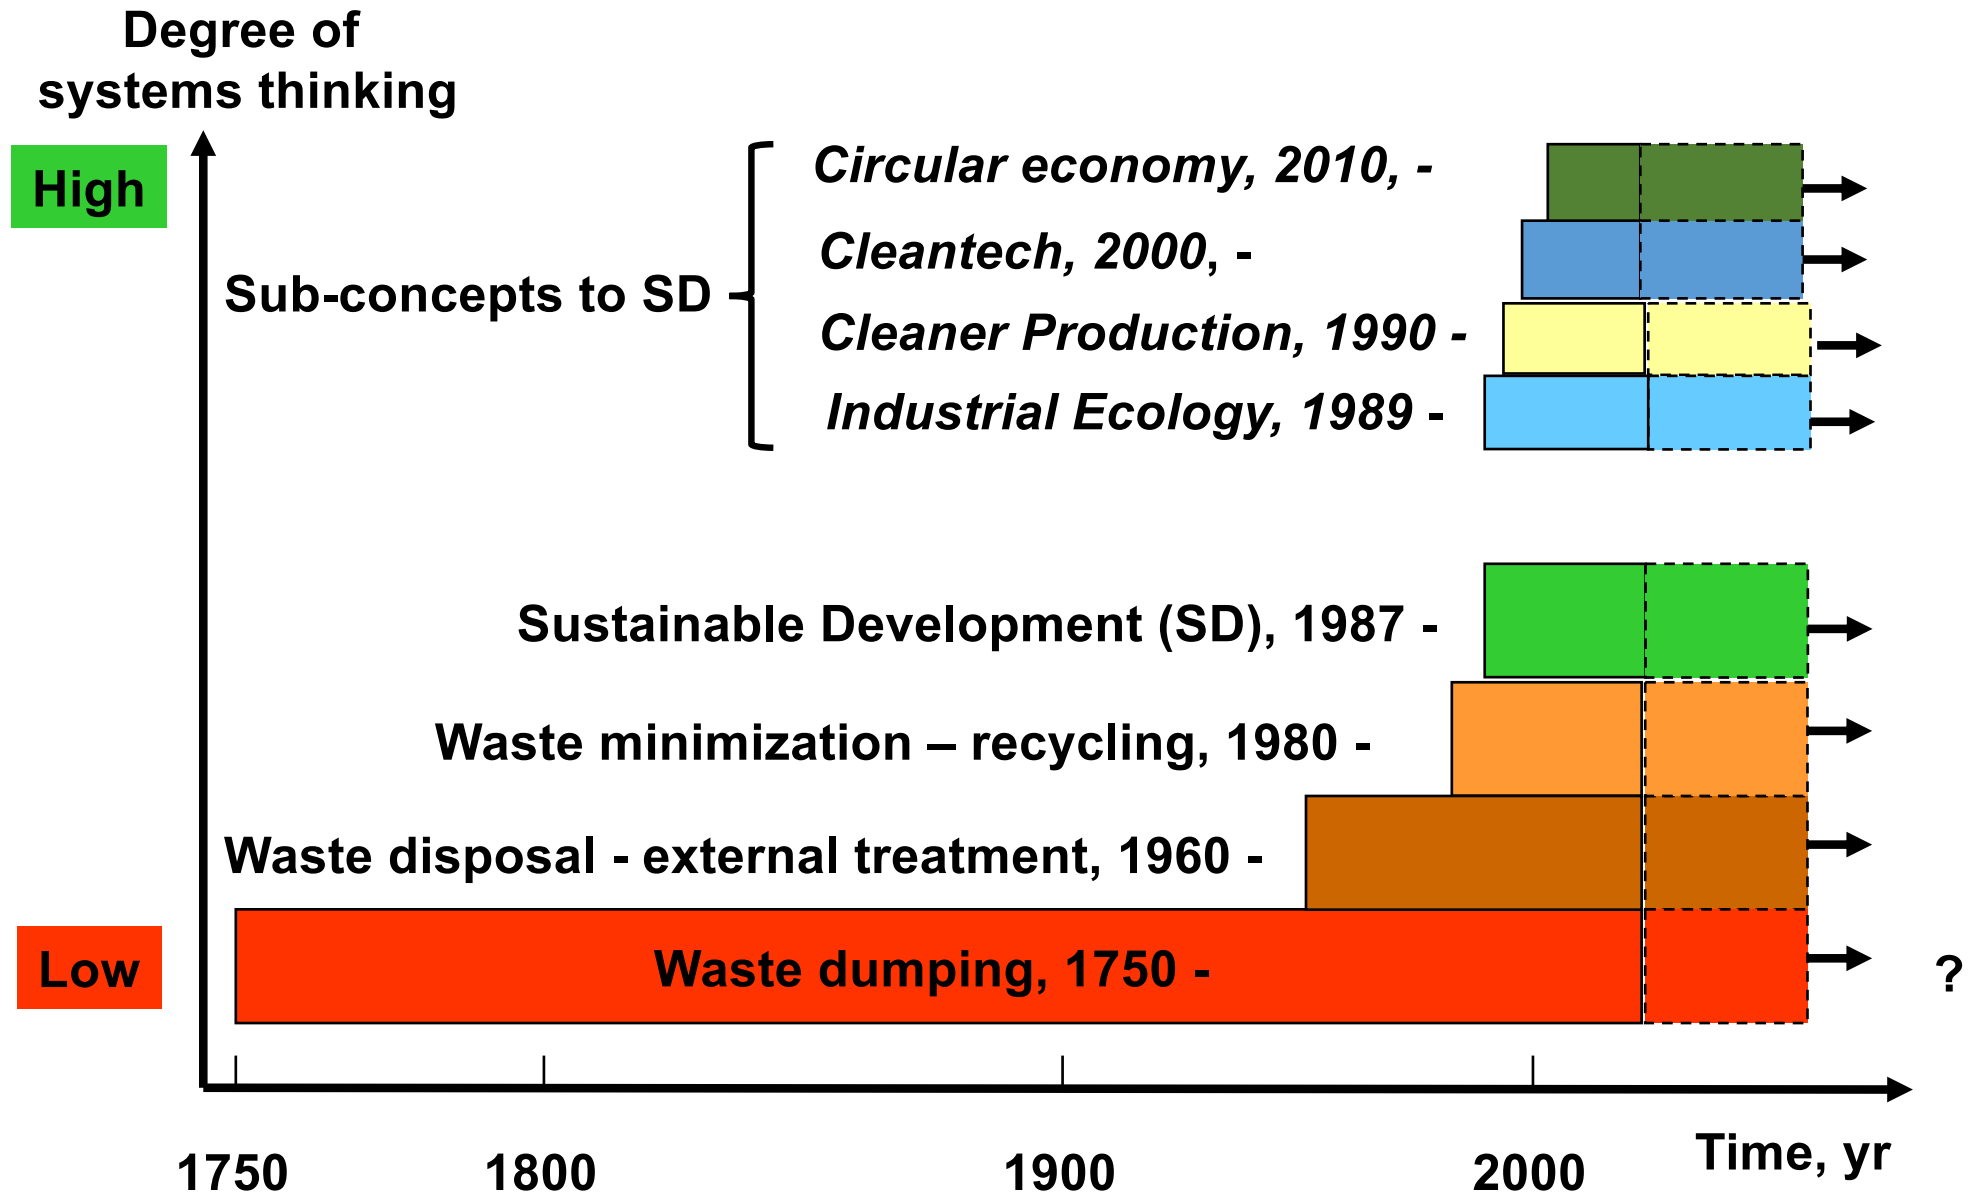

Material flows and ecocycles – now and in the future

Now

Society

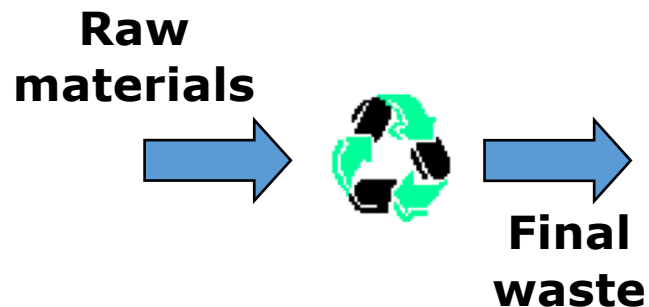

High raw material use
Low degree of recycling


Future

Society




Low raw material use
High degree of recycling


The Life Cycle Perspective Cleantech and Cleaner Production

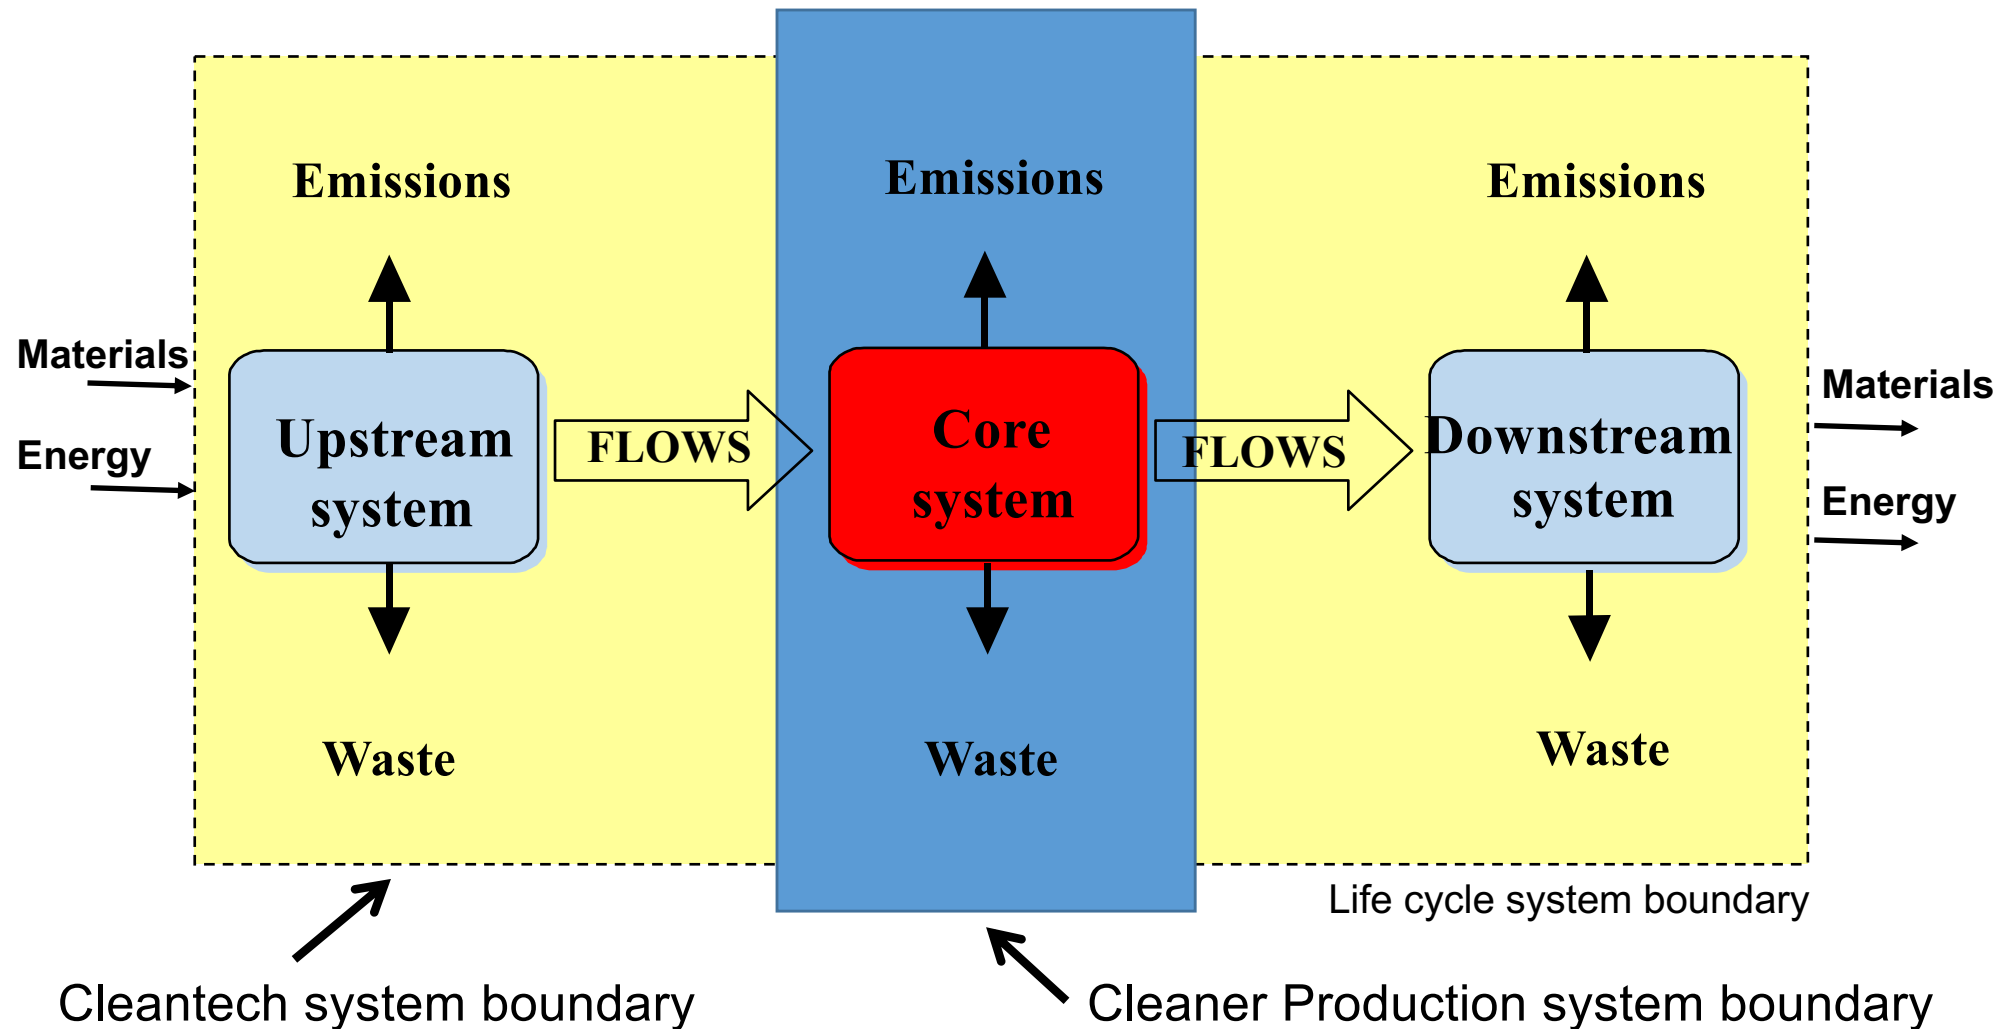

The paradigm shift in ecologic thinking

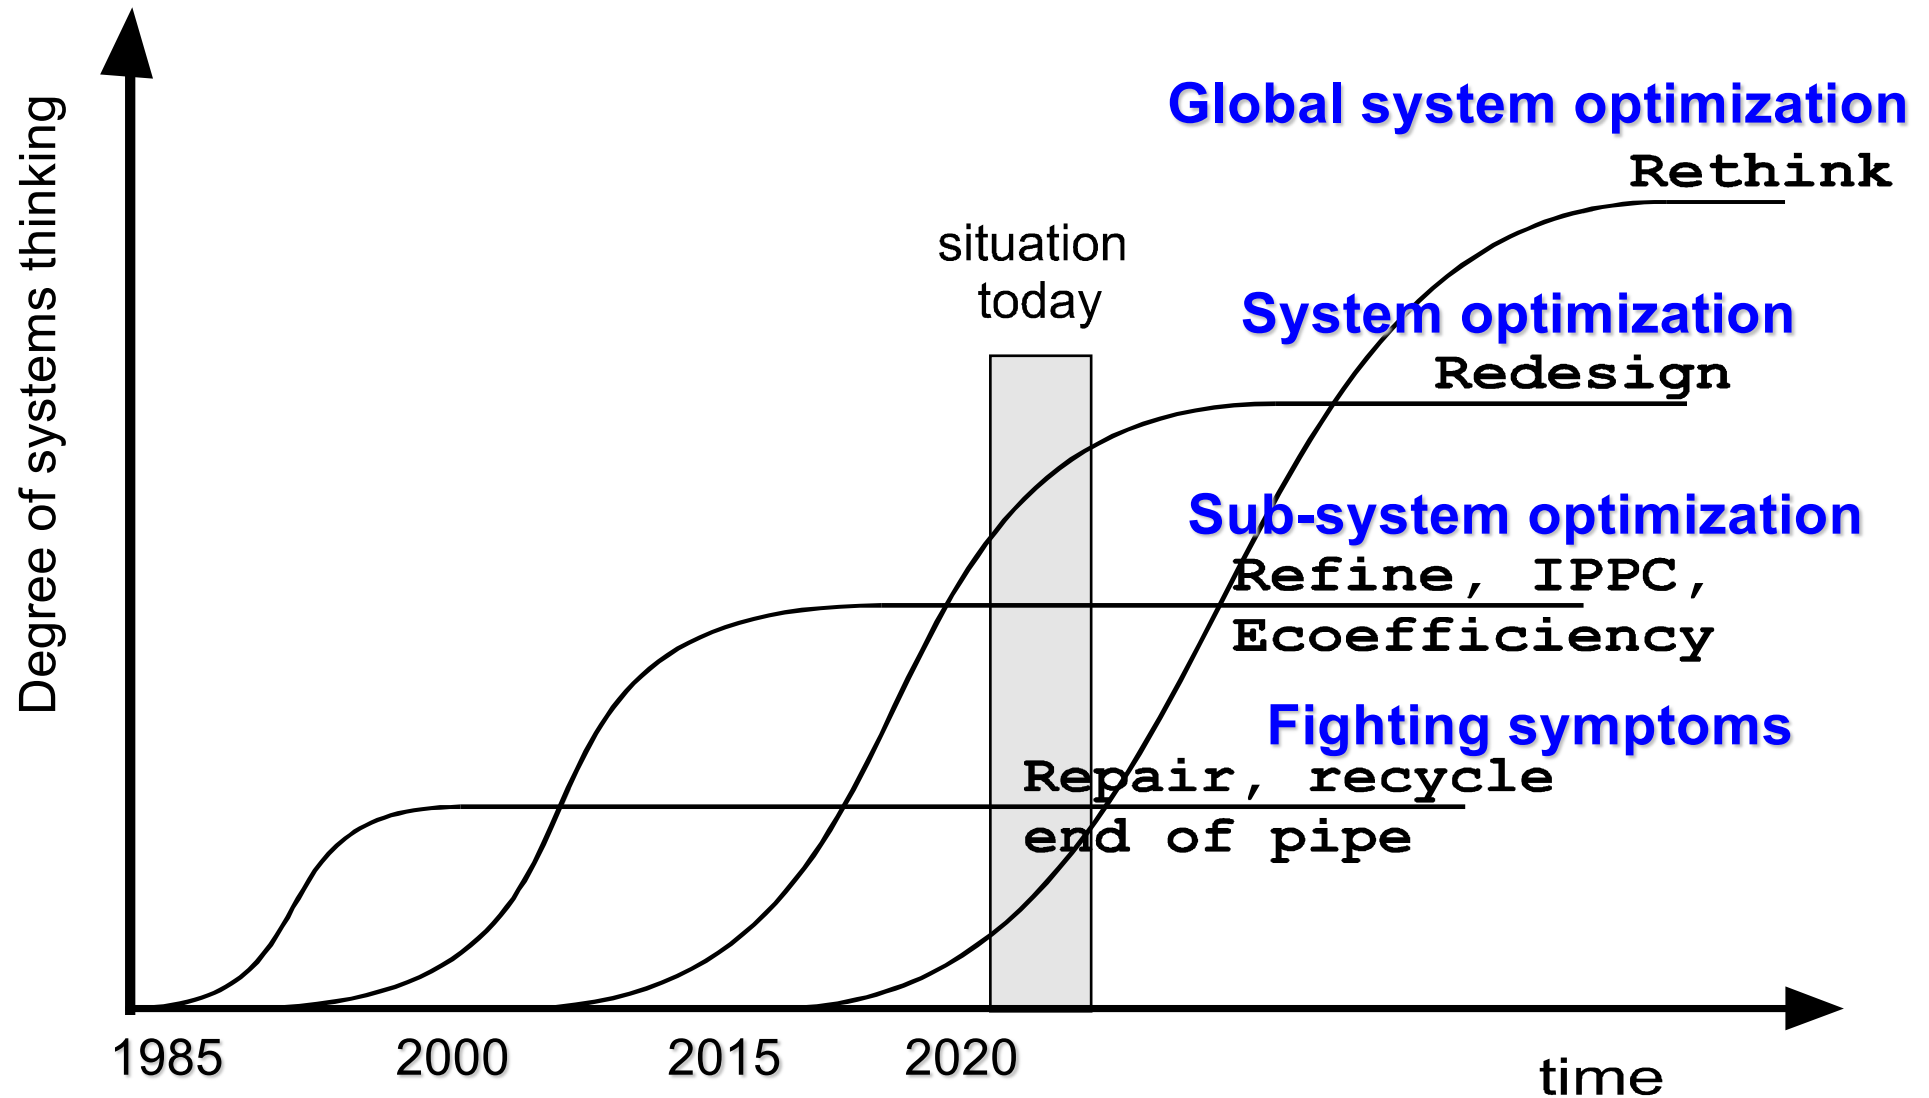

The paradigm shift applied for international cooperation travel

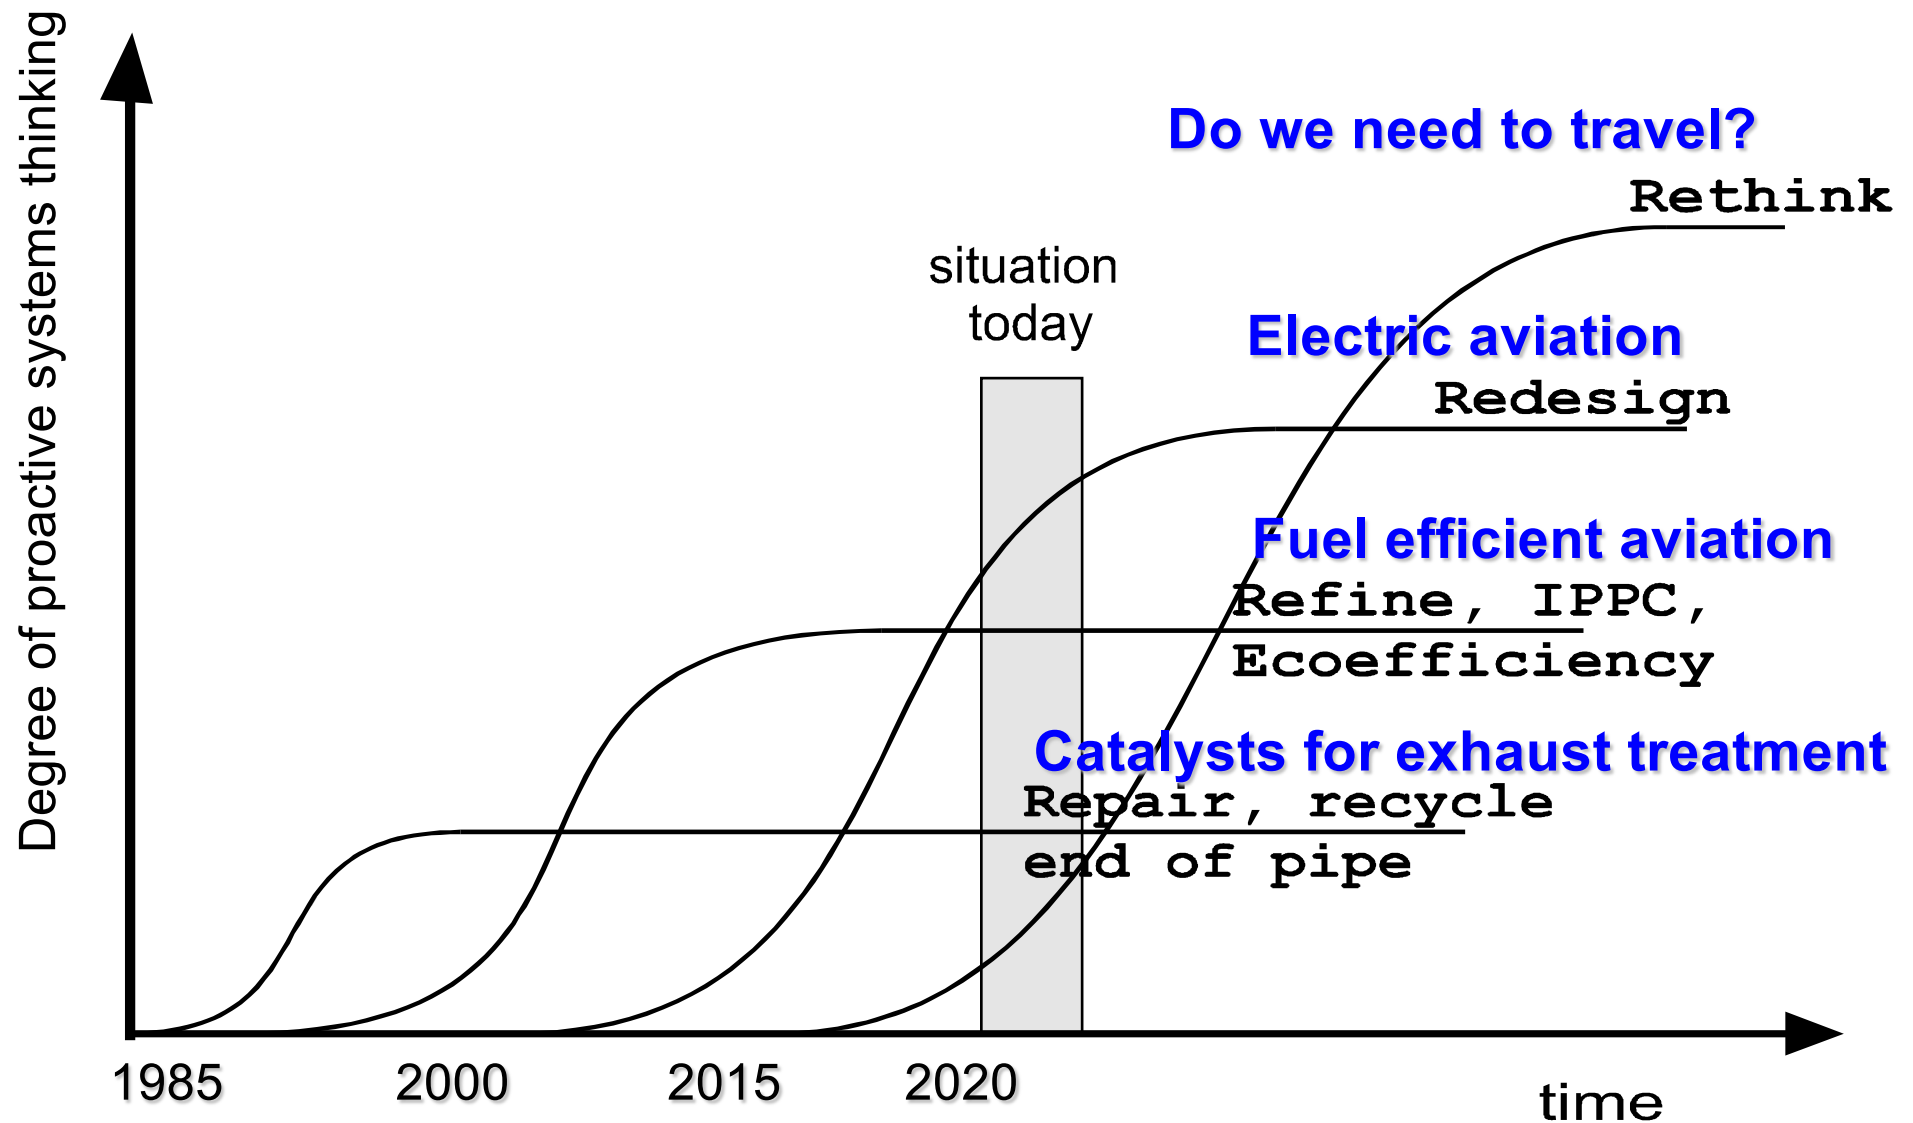


Global freshwater use 1900-2014

Global freshwater use over the long-run

Global freshwater withdrawals for agriculture, industry and domestic uses since 1900, measured in cubic metres (m³) per year.


Our World
in Data

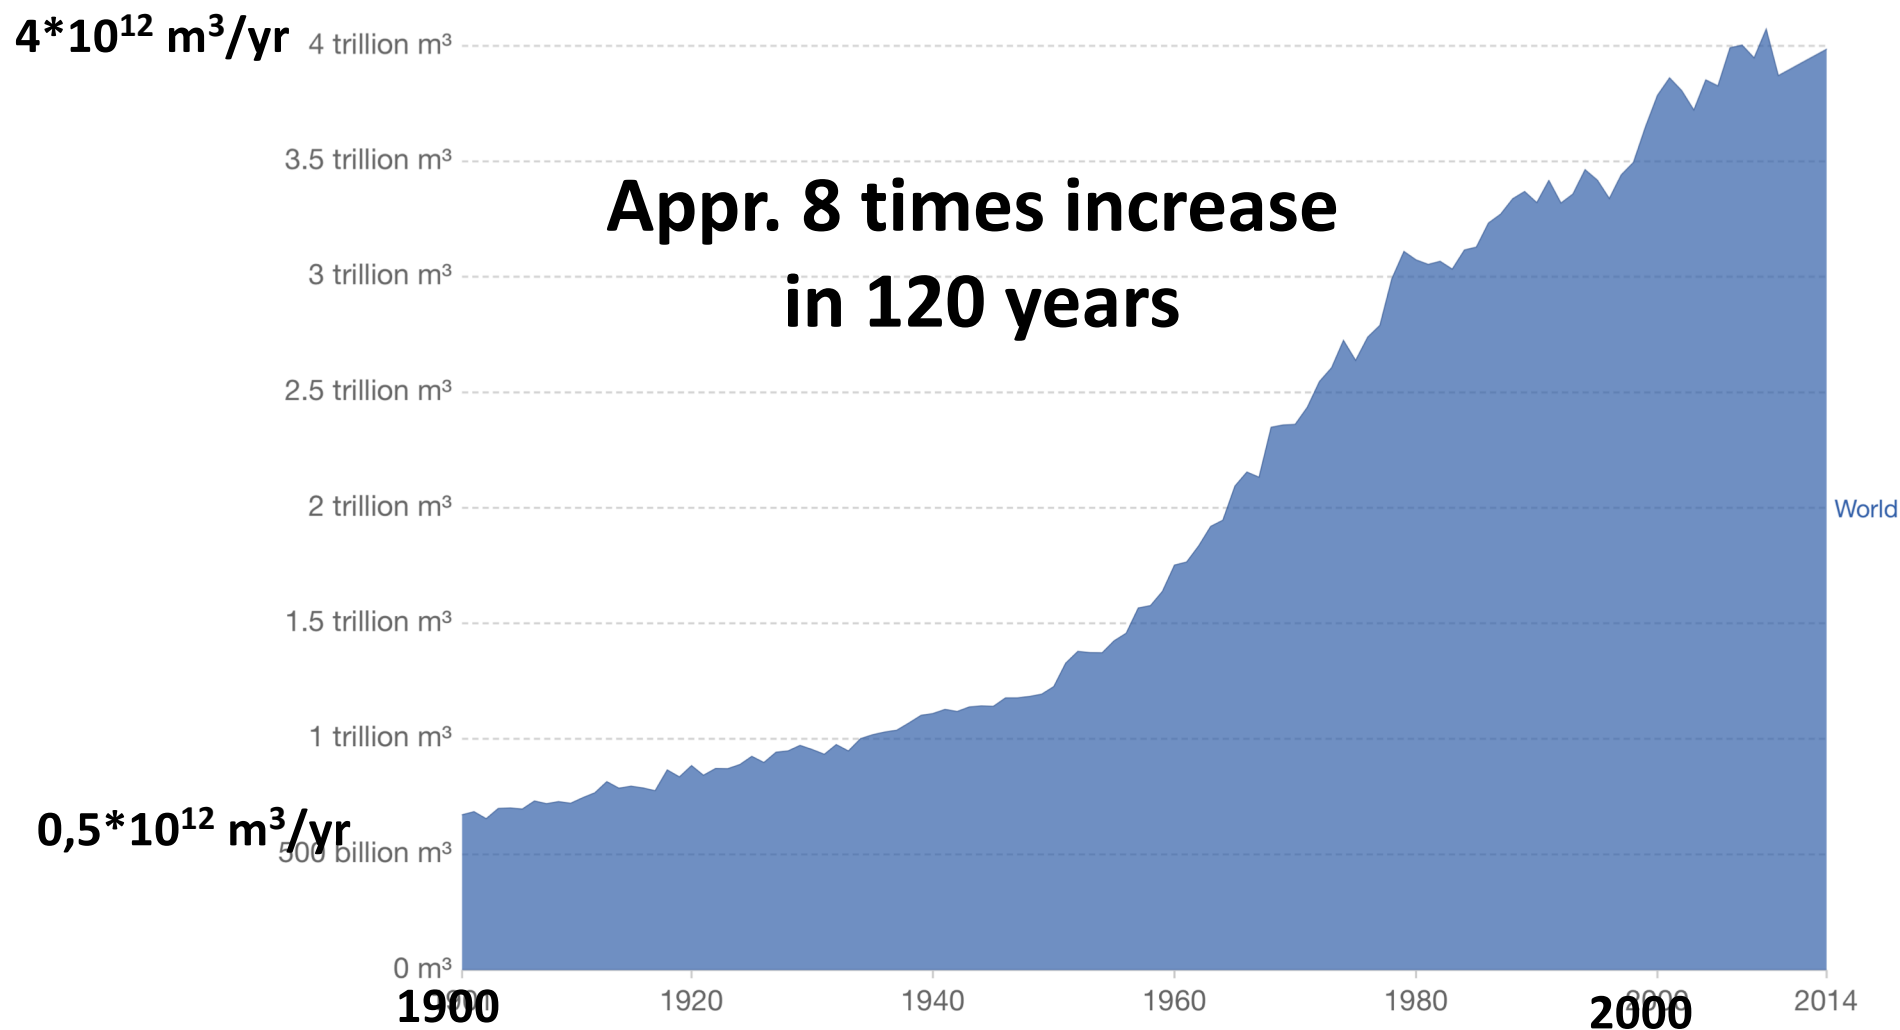

Source: Global International Geosphere-Biosphere Programme (IGB)

OurWorldInData.org/water-access-resources-sanitation/ • CC BY

How much is 4 trillion m³ water per year

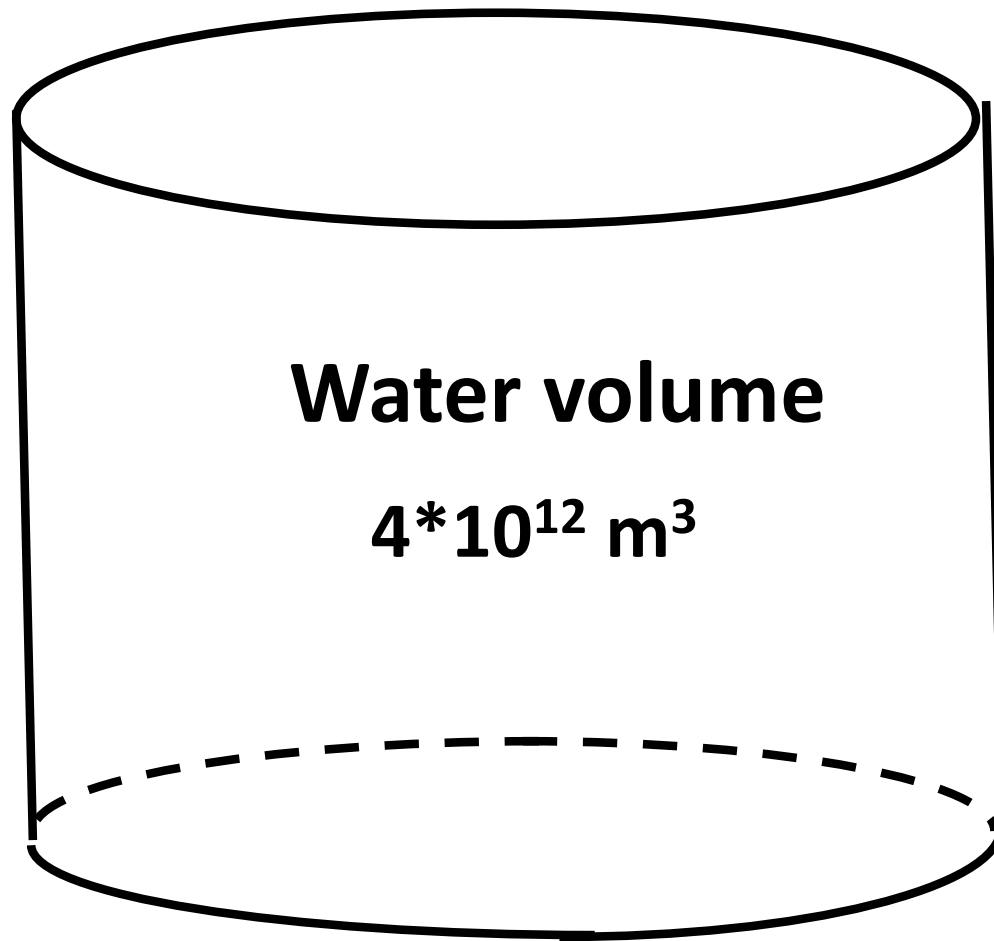


Height = 17,2 km

Tank diameter = 17,2 km

Global Water Consumption 1900 – 2025

(by region, in billions of m³ per year)

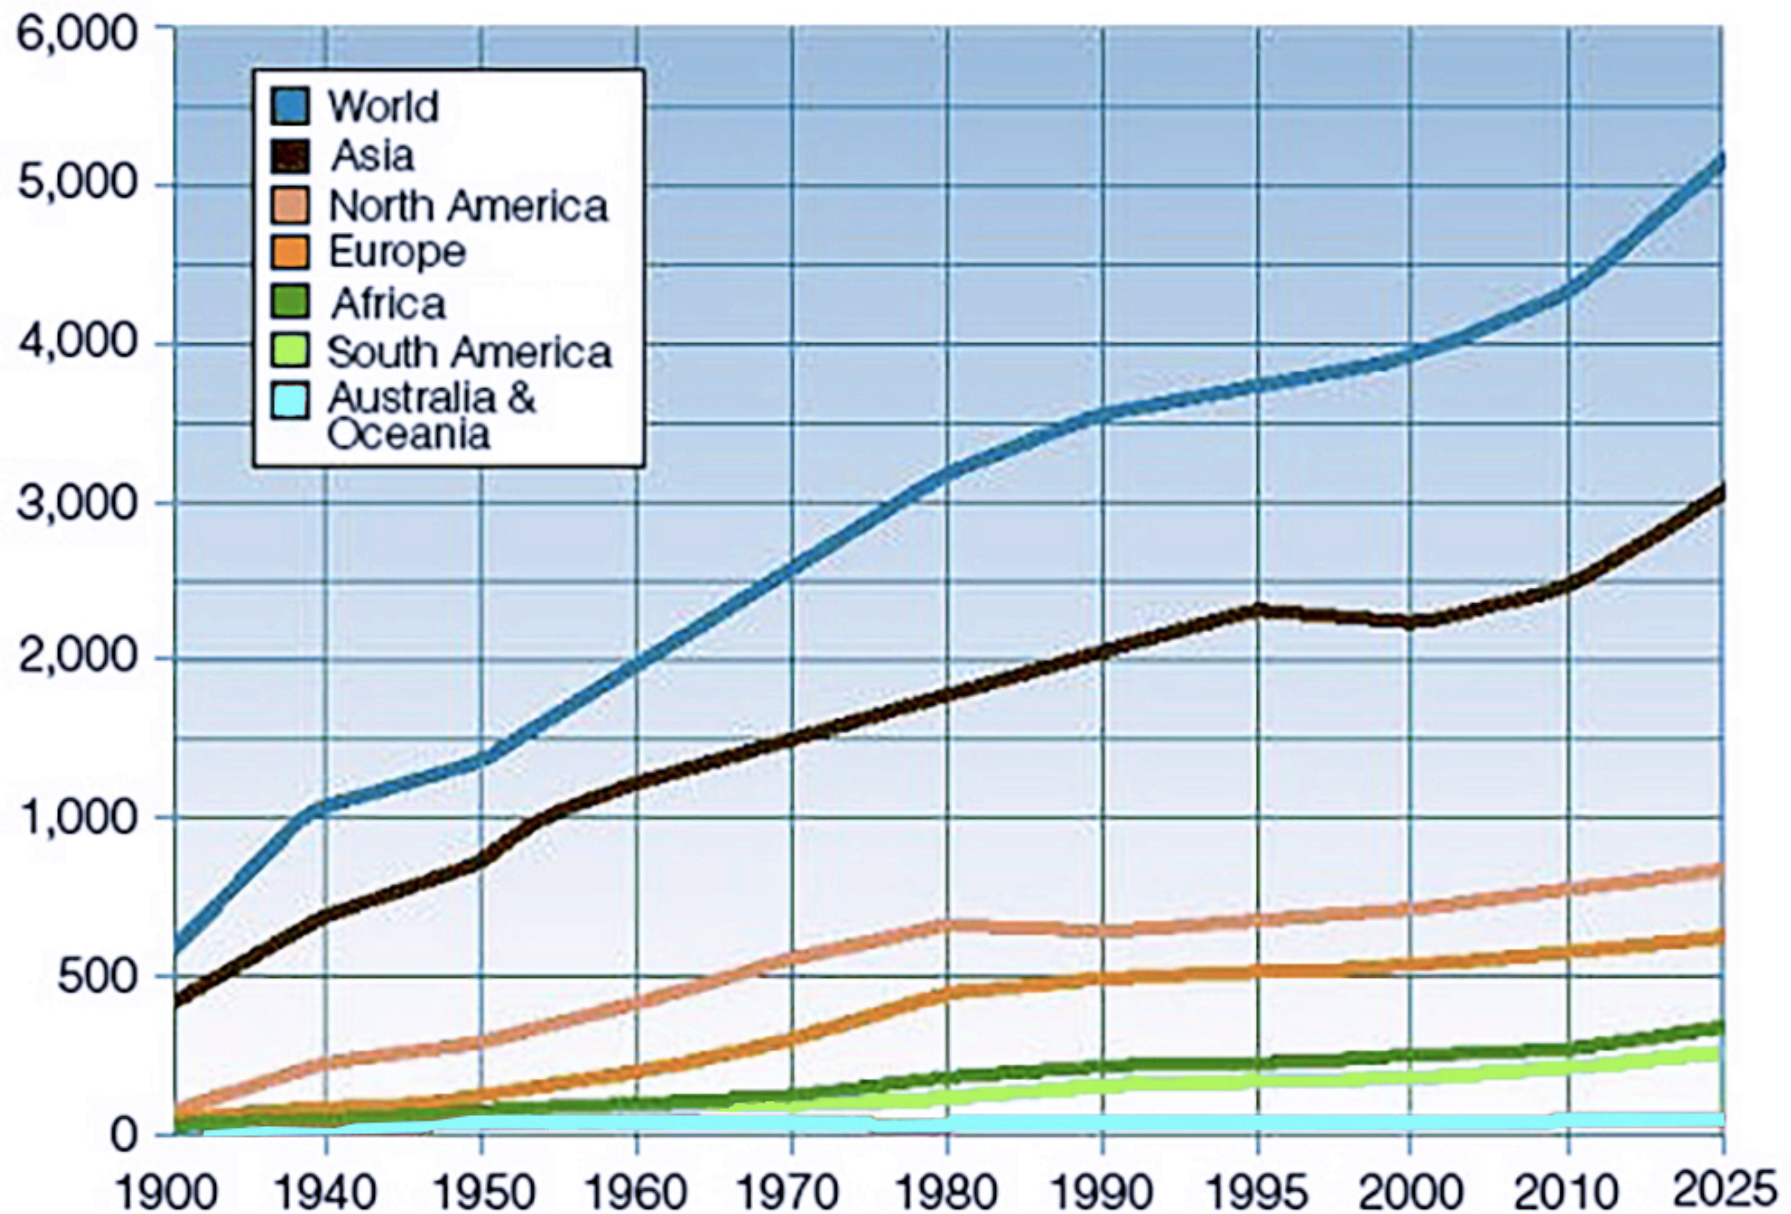


Water withdrawal in Uzbekistan 1995 – 2005

$\text{m}^3/\text{capita} \cdot \text{yr}$

Water withdrawals per capita, 1995 to 2005

Total water withdrawals from agricultural, industrial and municipal purposes per capita, measured in cubic metres (m^3) per year.

Our World
in Data

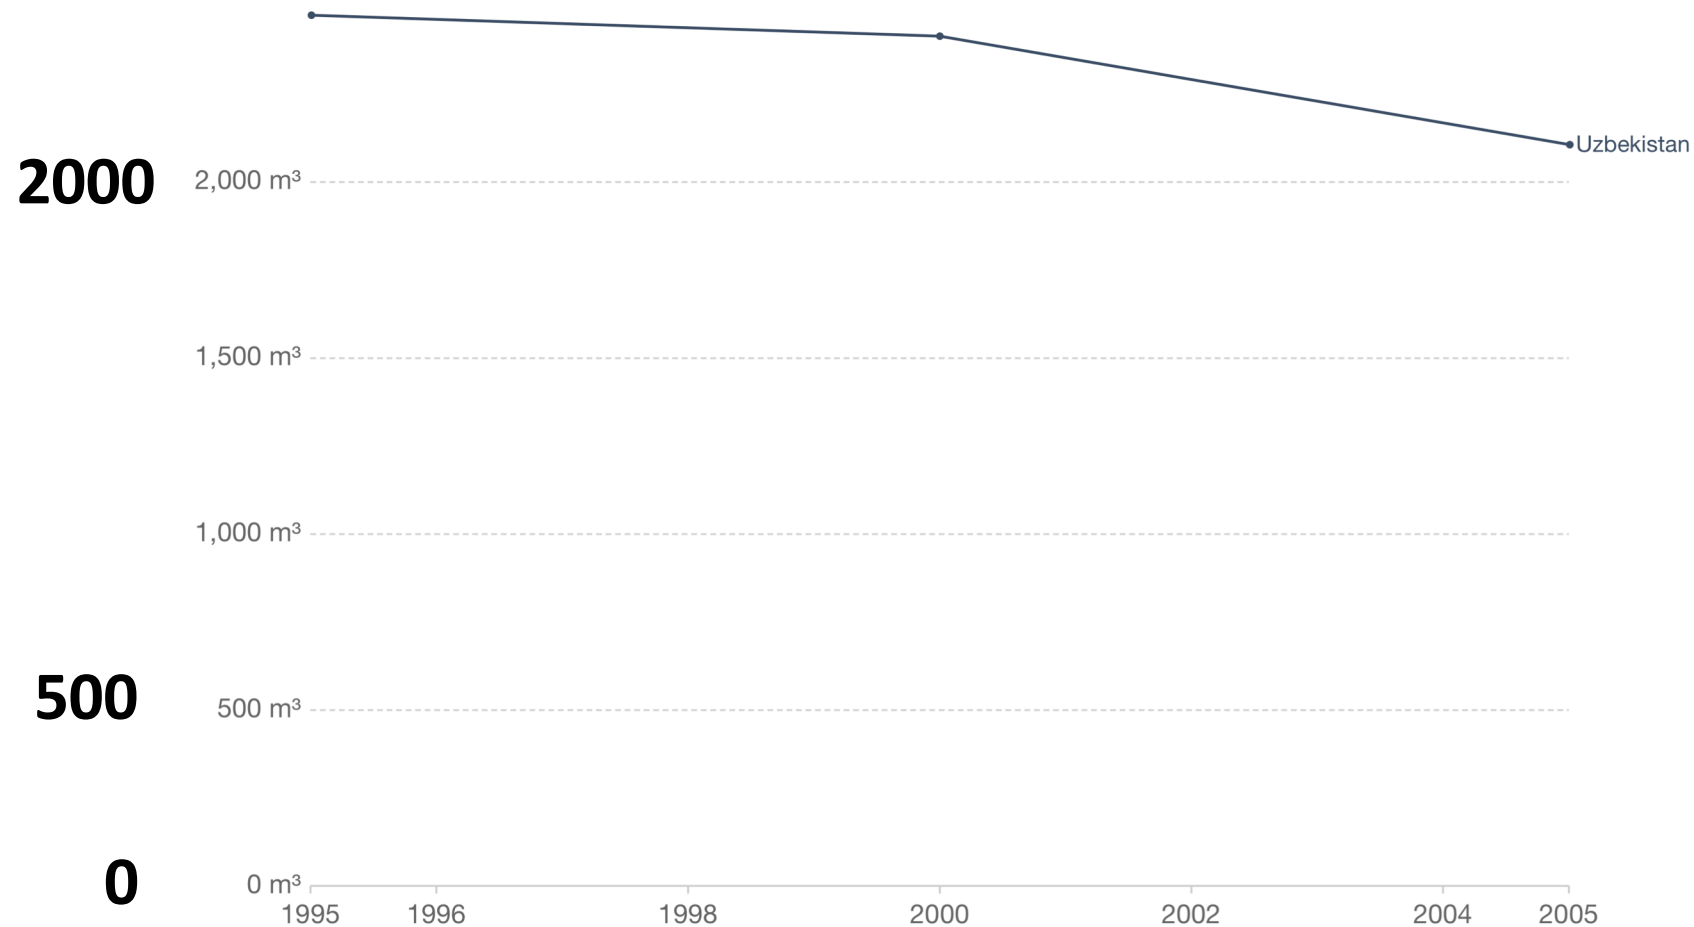

Source: UN Food and Agricultural Organization (FAO) AQUASTAT

OurWorldInData.org/water-access-resources-sanitation/ • CC BY

1995

2005

Water use in three countries 2002 and 2017

Water withdrawal in Uzbekistan, USA and Sweden 2002 and 2017

Parameter type	Parameter	Uzbekistan 2002	USA 2002	Sweden 2002	Uzbekistan 2017	USA 2017	Sweden 2017
Absolute	Agricultural water, 10 ⁹ m ³ /yr	53,7	195	0,135	54,4	176	0,075
Absolute	Industrial water, 10 ⁹ m ³ /yr	2,14	301	1,50	2,13	210	1,35
Absolute	Municipal water, 10 ⁹ m ³ /yr	3,61	64,6	1,04	2,41	58,4	0,96
Absolute	Total withdrawal, 10 ⁹ m ³ /yr	59,4	561	2,68	58,9	444	2,38
Relative	Agricultural water, m ³ /cap*yr	2123	677	15,2	1679	542	7,5
Relative	Industrial water, m ³ /cap*yr	85	1045	168	66	646	135
Relative	Municipal water, m ³ /cap*yr	143	224	117	74	180	96
Relative	Total withdrawal, m ³ /cap*yr	2348	1948	301	1818	1366	238
Population, millions		25,3	288	8,91	32,4	325	10,0

Examples of water saving measures

1. Start to monitor water use carefully
2. Install valves to close water when not used
3. Fix “low hanging fruits” (leaks etc)
4. Reuse of wastewater (down-classing of water)
5. Recirculate cooling water after cooling
(closed cooling water system)
6. Install recirculation of process water (after
specific purification)
7. Redesign processes (e.g install counter current
rinsing)

**Ortviken paper mill in Sundsvall, Sweden –
a major water user that emits a lot of water as steam**



Field irrigation system in Uzbekistan



Lecture break discussion questions

What is the difference between a narrow (core system) perspective and a life cycle perspective on emissions?

What main conclusions can be drawn from the water withdrawal numbers presented for Uzbekistan, USA and Sweden?

Part 2

Cleaner Production

Cleaner Production

**UNEP (United Nations Environmental Program)
definition of Cleaner Production**

“Cleaner production means the continuous application of an integrated, preventative environmental strategy to processes, products and services to increase eco-efficiency and reduce risks to humans and the environment”

Cleaner Production may be regarded not only as a goal but rather as a journey towards shaping a more efficient physical resource metabolism in industrial activities

Cleaner Production – priorities

In the work towards Cleaner Production – especially when considering processes that are open and discontinuous – it is important to establish a list of priorities between different potential and desirable measures. Such a priority list would normally consider health and process accident risks before environmental risks according to the following:

- | | |
|--------------------|--|
| Priority 1: | Health aspects for the workers |
| Priority 2: | Process accident risks |
| Priority 3: | Risks for local environmental impact |
| Priority 4: | Risks for regional environmental impact |
| Priority 5: | Risks for global environmental impact |

The Cleaner Production Project

- 1. Issue raised**
- 2. Management decision**
- 3. Cleaner production group assigned**
- 4. Mass and energy balances established**
- 5. Improvement alternatives selected**
- 6. Feasibility of alternatives assessed**
- 7. Selection of preferred alternative**
- 8. Project implementation**
- 9. Project evaluation**

Cleaner Production in practice – the necessity to integrate auditing, monitoring and practical measures

In practice, it is absolutely necessary to integrate the work with monitoring, evaluation and auditing in Cleaner Production. Without this integration, there will be a suboptimisation of the work with Cleaner Production. Two important Initial considerations are:

- 1. With primitive processes – (i) open and/or (ii) non-continuous it will be necessary to reconsider the design of the processes themselves**
- 2. With advanced processes (closed and/or continuous the work with Cleaner Production can be based on the establishment of mass- and energy balances**

Basic Approaches to Cleaner Production

In order of complexity, time and investment

1. Good Housekeeping (actions without investment)
2. Improved process monitoring and control
3. Input-Substitution (less polluting/toxic raw materials)
4. In-situ recycling (e.g. water and chemicals)
5. Technological optimisation (Process modification)
6. Redesign of product, by-products and or packaging
7. Off-site recycling (e.g. aluminium or paper)


Mass and energy balances as a basis for Cleaner Production measures

It is necessary to establish mass and energy balances in order to set up appropriate priorities for Cleaner Production measures. It is very important to consider this in the planning of both initial and permanent monitoring programs for the activity in focus. At least two levels of balances will have to be established:


First step: Balances for the entire process the factory

**Second step: Balances for the most important sub
processes**

Mass and energy balances – fundamental approach 1

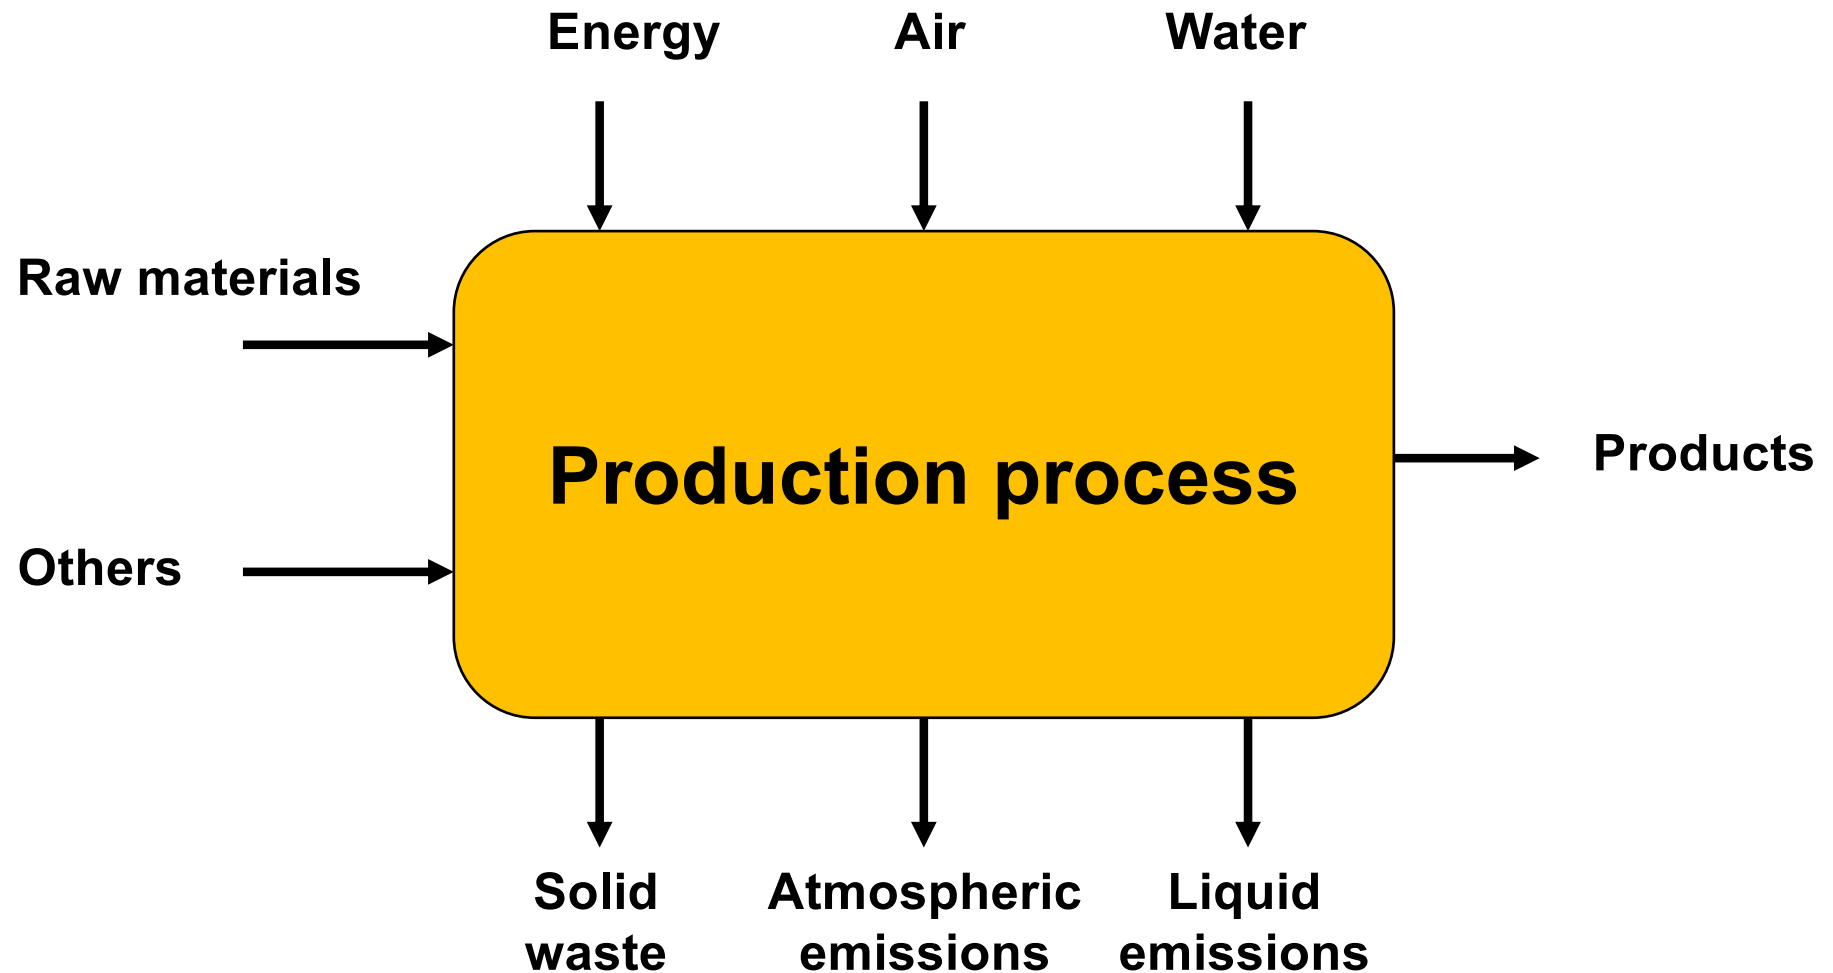

Mass and energy balances – fundamental approach 2

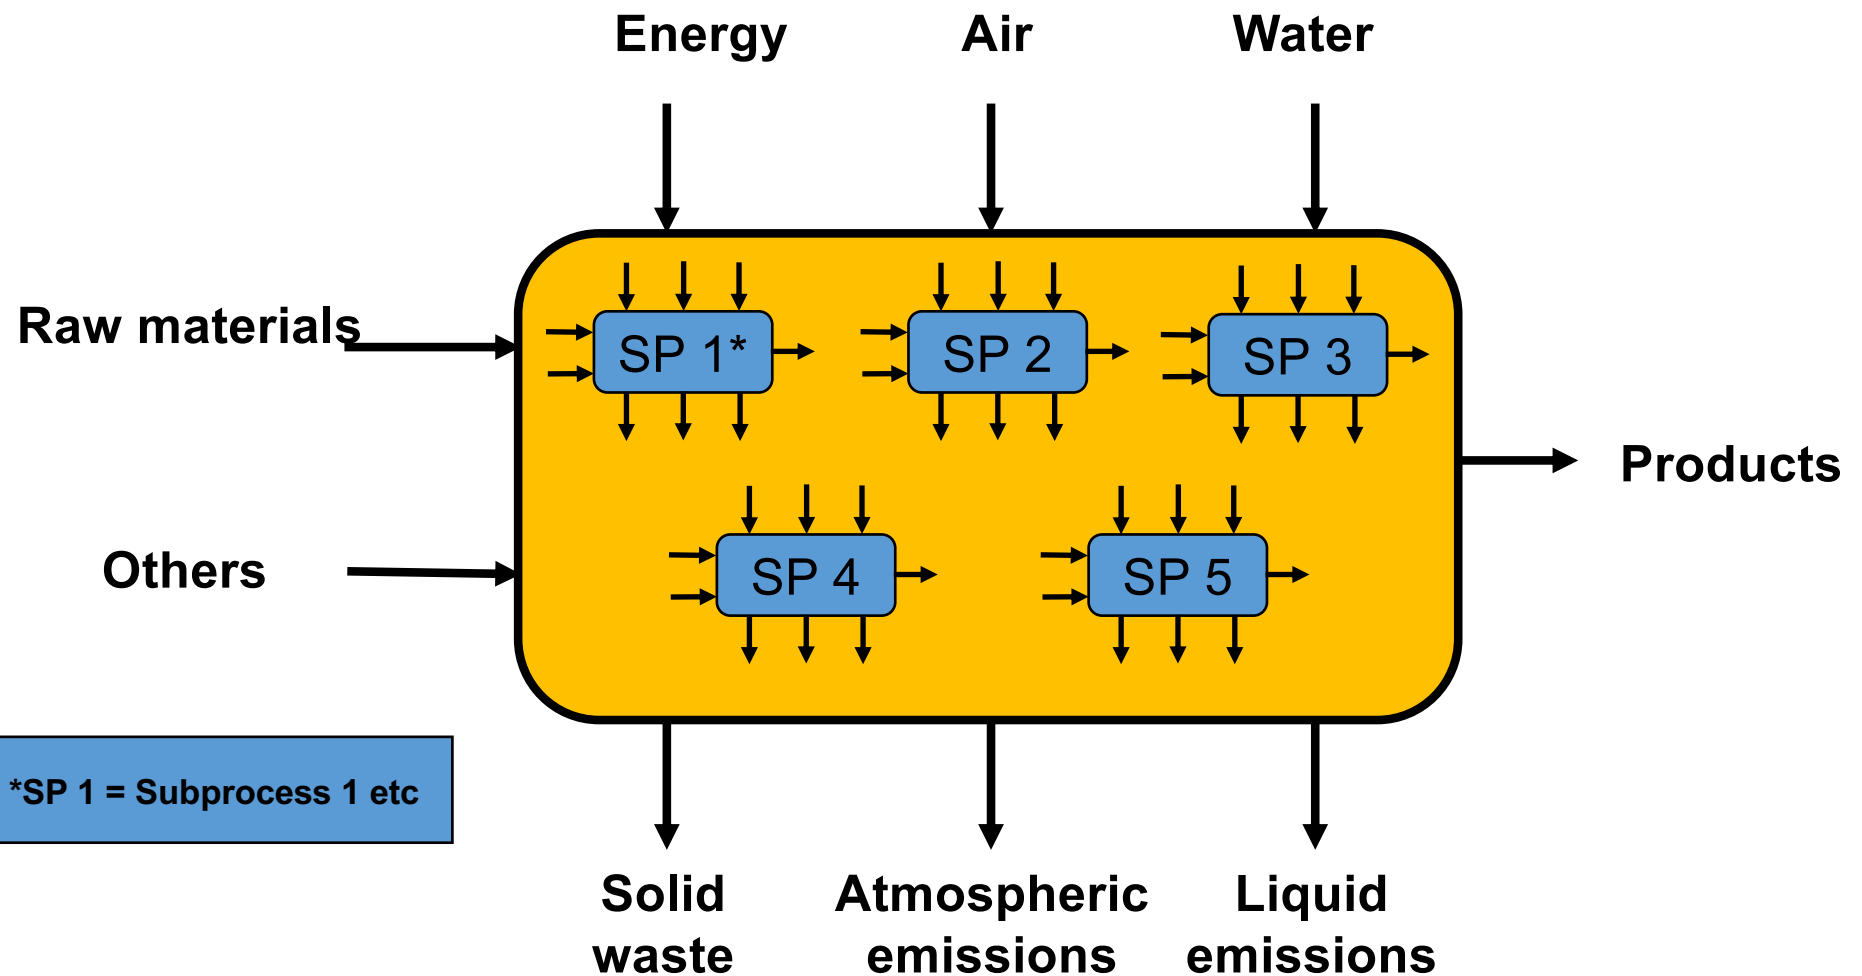


Cleaner Production Mass and Energy Balances Methodology

- 1. Aim of the study**
- 2. System boundaries**
- 3. Materials considered**
- 4. Processes/subsystems included**
- 5. Time span**
- 6. Quantification of flows and stocks**
- 7. Presentation of results**
- 8. Conclusions from results**

Example – Detergent factory

Code Description

EF = Effluents
SW = Solid wastes
EM = Atmospheric Emissions
M = Monitoring point

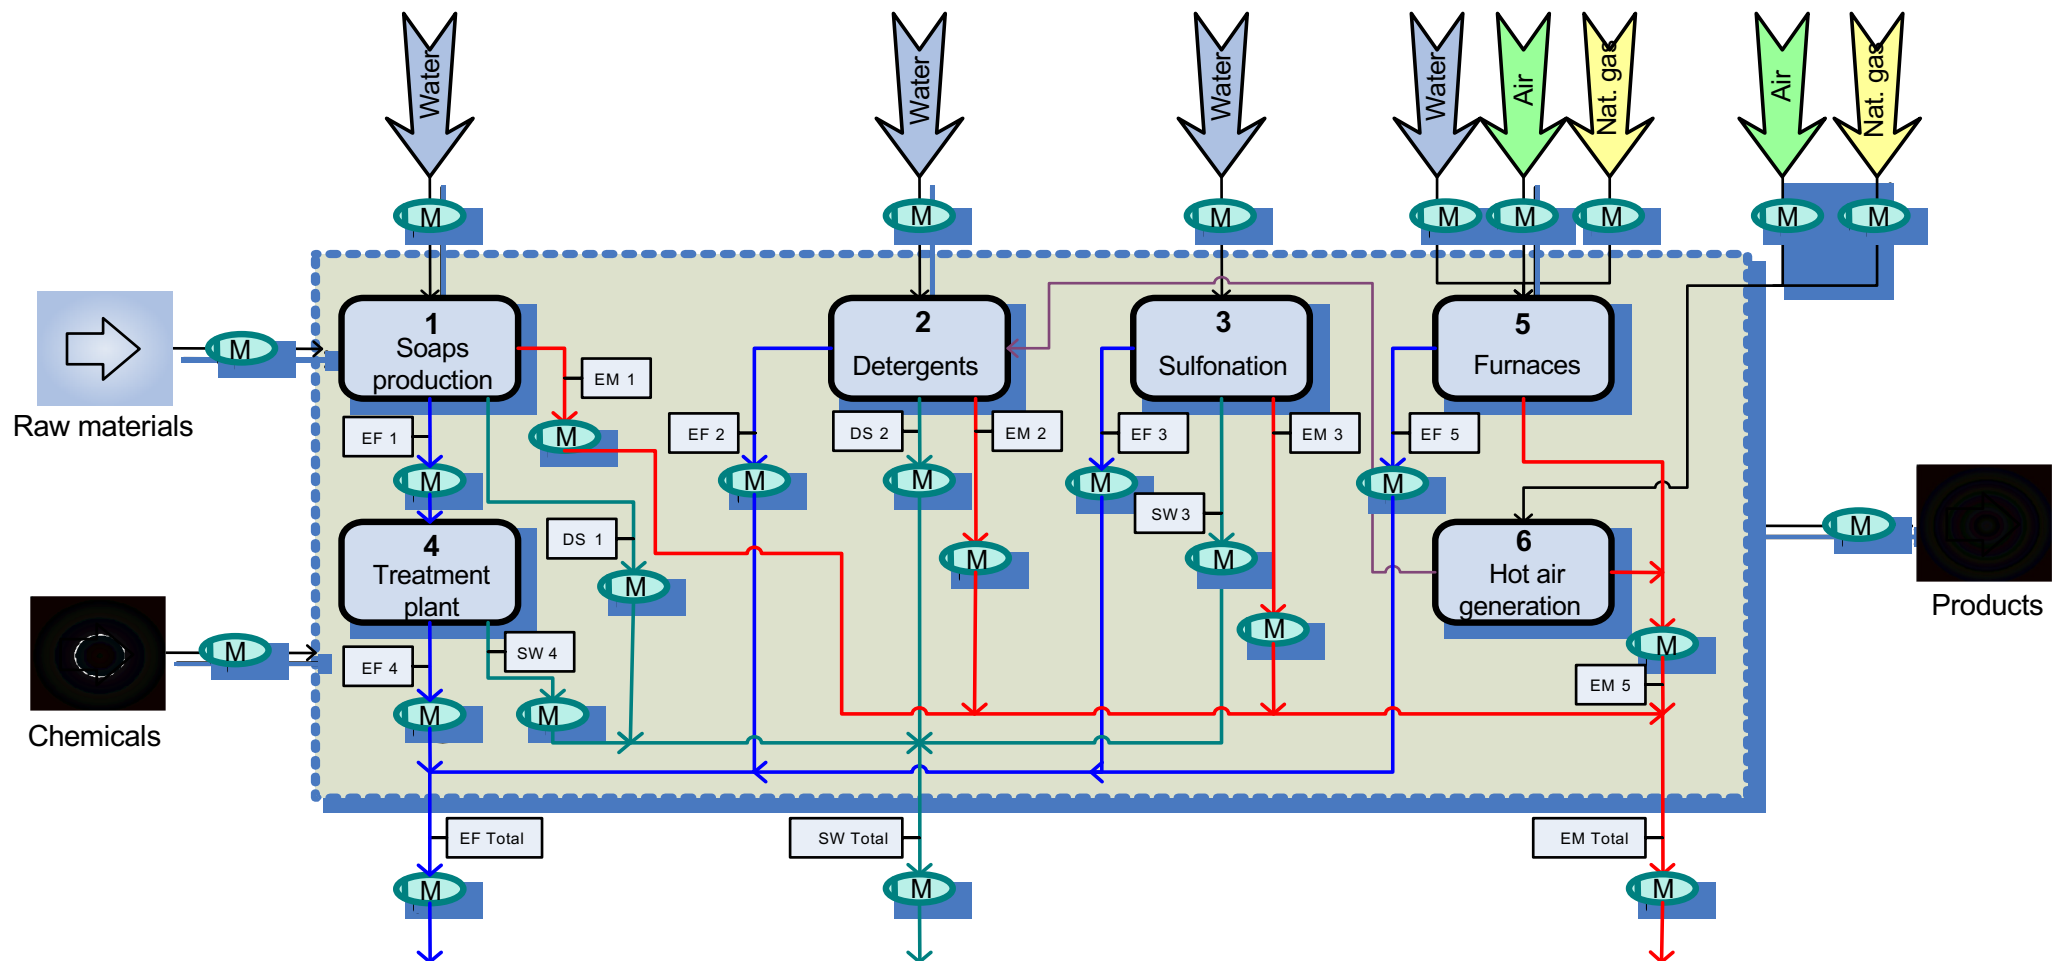

Examples of results from Cleaner Production Projects

Contribution from different measures
and payback period

Product area	Metal working	Dairy products	Car components	Beverages	Paints	Fine Chemicals	Average, %
Good housekeeping, %	42	53	44	55	48	15	43
Source reduction, %	0	0	0	0	0	45	8
Process modification, %	0	26	36	13	30	0	18
Materials substitution, %	12	5	4	0	3	0	4
In-situ recycling, %	0	16	12	13	16	35	15
Off-site recycling, %	4	0	4	11	3	5	5
Product Modification, %	42	0	0	8	0	0	8
Payback time, yrs*	1,0	0,3	3,2	6,2	0,43	8,0	3

* Without interest

Lead battery recycling in Cochabamba, Bolivia 2004



Suggested reading on Cleaner Production

www.un.org/esa/sustdev/sdissues/technology/cleanerproduction.pdf

Thank you!

bjornfrostell@gmail.com